




LED Mini Cannon



	Single Colour 220W	Single colour 440W	Single colour 880W
Body construction	Die cast LM6 aluminium - powder coated	Die cast LM6 aluminium - powder coated	Die cast LM6 aluminium - powder coated
Front glass cover	5mm tempered safety glass.	5mm tempered safety glass.	5mm tempered safety glass.
LED type	Lumileds or Luminus or Seoul	Lumileds or Luminus or Seoul	Lumileds or Luminus or Seoul
Lighting performance	146 lumens per W at source – refer to IES files for exact lumens exiting product.	146 lumens per W at source – refer to IES files for exact lumens exiting product.	146 lumens per W at source – refer to IES files for exact lumens exiting product.
CCT	3000K or 4000K or 5000K standard Range from 2400K – 6500 on request – anything in between.	3000K or 4000K or 5000K standard Range from 2400K – 6500 on request – anything in between.	3000K or 4000K or 5000K standard Range from 2400K – 6500 on request – anything in between.
CRI	+80 + 90 available on request.	+80 + 90 available on request.	+80 + 90 available on request.
Supply voltage	230V AC/50hz - standard 120 -277V AC - on request	230V AC/50hz - standard 120 -277V AC - on request	230V AC/50hz - standard 120 -277V AC - on request
Additional protection	10KV – standard 20KV – optional Additional high/low voltage resettable switch optional	10KV – standard 20KV – optional Additional high/low voltage resettable switch optional	10KV – standard 20KV – optional Additional high/low voltage resettable switch optional
IP rating	IP 65	IP 65	IP 65
Weight	TBA	TBA	TBA
This product is suitable for operation in outdoor and marine environments. (not suitable for submersion)			

RGBW DMX option to follow

VAULT N SKY

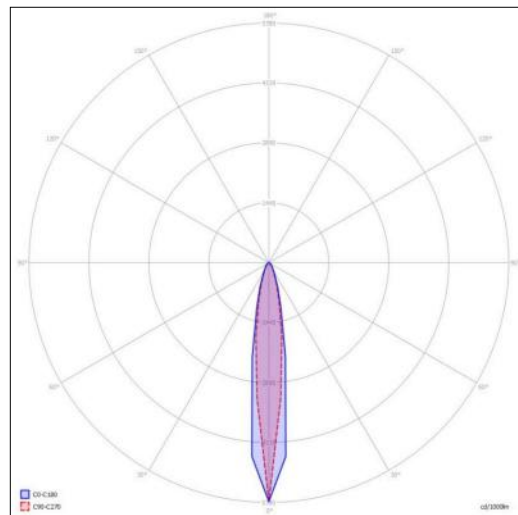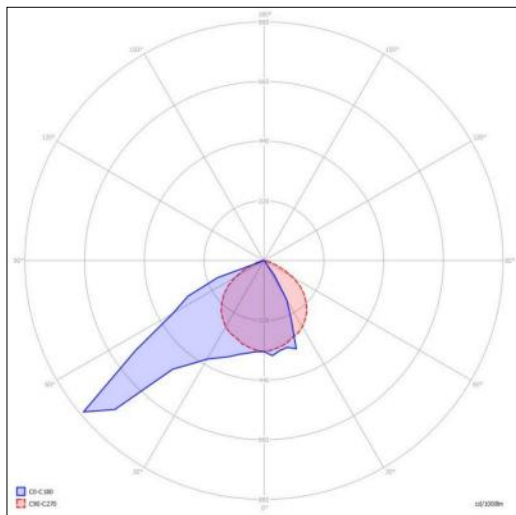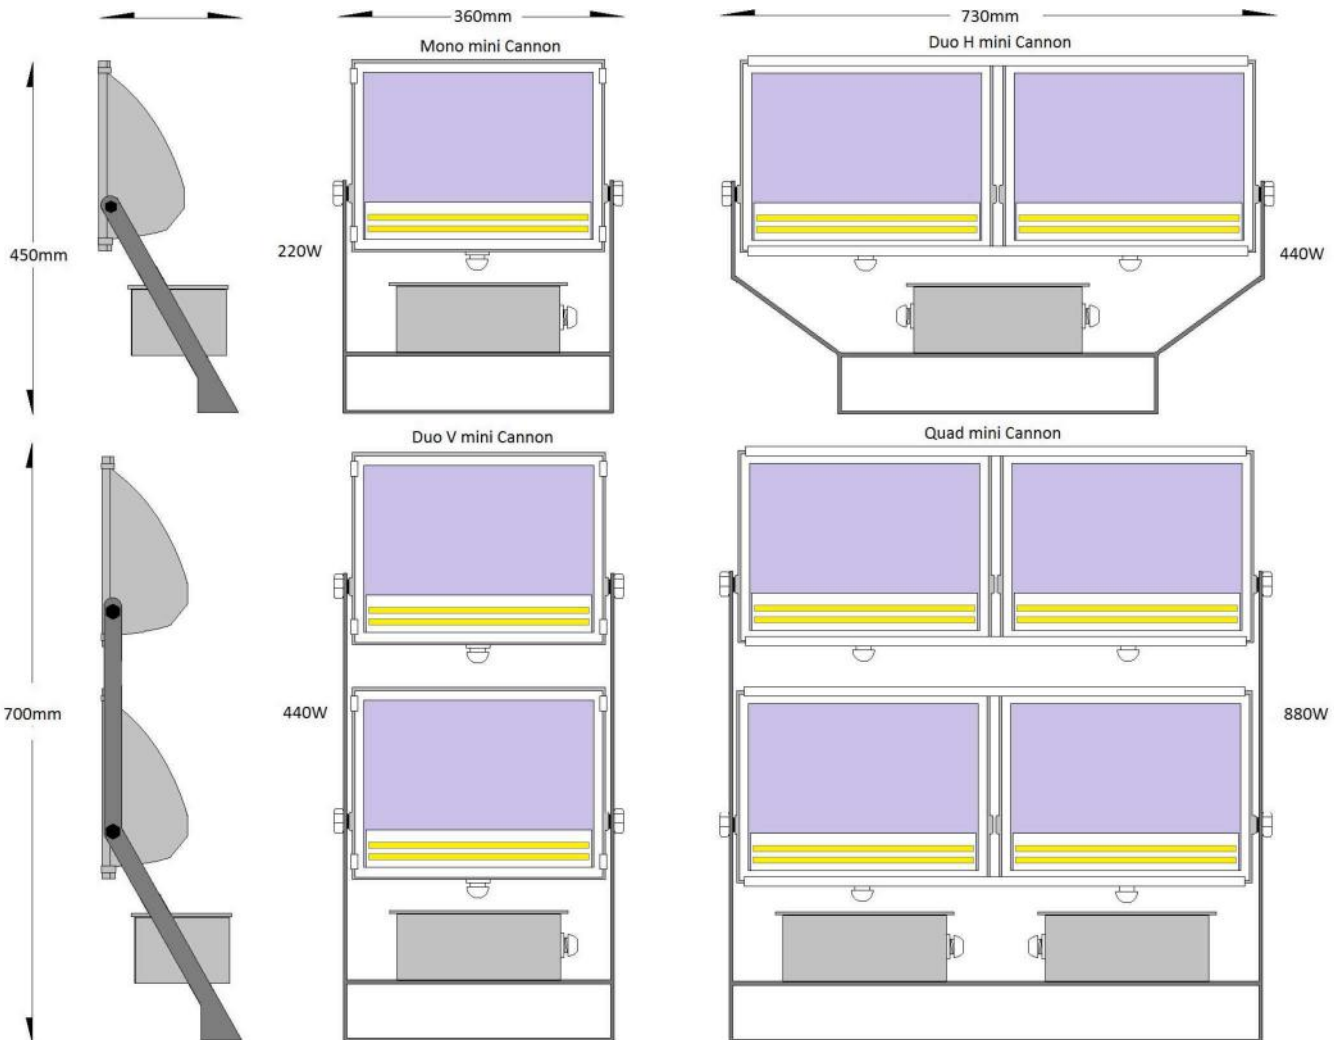

Vault On Sky (PTY) LTD
 Tel: +27 11 513 3161 / +27 784 096 174
 207B 2nd floor, SPACES Building, 128 Leslie Ave,
 Design Quarter, Fourways, 2191 Gauteng South Africa
www.vaultonsky.co.za email: charles@vaultonsky.co.za;