

## Softlight Tilt Downlight V2

EFFECT LIGHTING





Vault On Sky (PTY) LTD  
Tel: +27 11 513 3161 / +27 784 096 174  
207B 2nd floor, SPACES Building, 128 Leslie Ave,  
Design Quarter, Fourways, 2191 Gauteng South Africa  
[www.vaultonsky.co.za](http://www.vaultonsky.co.za) email: [charles@vaultonsky.co.za](mailto:charles@vaultonsky.co.za);



THIS DOWNLIGHTER PROVIDES A SOFT WARM LIGHT IDEALLY SUITED TO THE HOSPITALITY ENVIRONMENT.



**FACT FILE**

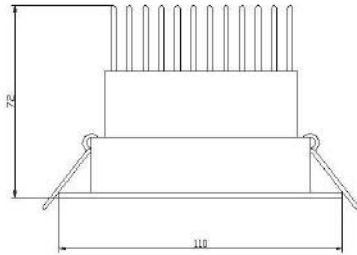

Cut out size

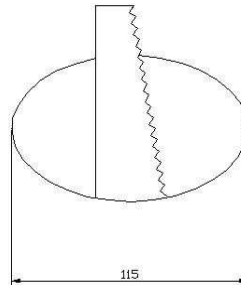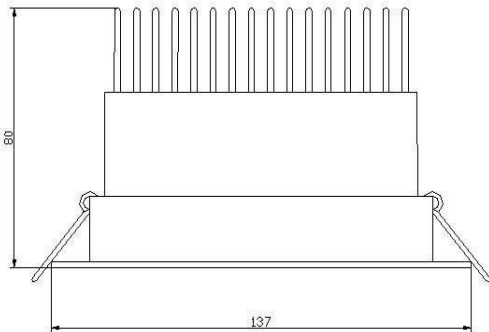

Cut out size

<b>SOFTLIGHT tilt downlights</b>		
	<b>Softlight 1000 V2</b>	<b>Softlight plus 2000 V2</b>
Trim construction	Polycarbonate with acrylic cover lens	Polycarbonate with acrylic cover lens
Reflector 45 degree spread	High purity aluminium - spun and polished with anti glare, non tarnish finish.	High purity aluminium - spun and polished with anti glare, non tarnish finish.
Output characteristics	3000K warm white – 900 lumens 10W 5000K Soft white – 1100 lumens 10W	3000K warm white 1800 lumens 20W 5000K soft white 2200 lumens 20W
Supply voltage	230V AC 50 Hz	230V AC 50Hz
IP rating	IP 20	IP 20
Control – not dimmable as standard, but with correct control gear can be controlled via; Triac dimming, 1-10V, DMX as well as DALI		

Lumen values are as measured at source - on the PCB - not exiting light fitting. Values are subject to change at any time and without notice.

Vault On Sky (PTY) LTD  
 Tel: +27 11 513 3161 / +27 784 096 174  
 207B 2nd floor, SPACES Building, 128 Leslie Ave,  
 Design Quarter, Fourways, 2191 Gauteng South Africa  
[www.vaultonsky.co.za](http://www.vaultonsky.co.za) email: [charles@vaultonsky.co.za](mailto:charles@vaultonsky.co.za);